
Soft Close Toilet Seat – Vertical release SPH001



Fittings



Introduction

IMPORTANT: Please read these instructions carefully before you begin and retain for future reference. These instructions have been prepared for your guidance, you must exercise due care at all times.

We do not accept responsibility for any problems that may occur through incorrect installation.




Installation notes


Before installation, please check that all parts have been supplied and are undamaged.


All the fittings shown are workable for installation.

Installation Steps

■ Before installation check that all parts are present.












3.Do not fully tighten.

4.Only install the seat and cover at an angle of 90±5°













7. Fully tighten the fixings.







10. To remove the seat and cover at an angle of 90±5°.





NOTE: Only install and remove the seat and cover at an angle of $90\pm5^\circ$. Failure to do this will result in damage to the seat and cover.


Operation

Allow the seat and lid to close under their own weight.


Care and Maintenance



Do not stand on the seat or lid as this can cause damage.

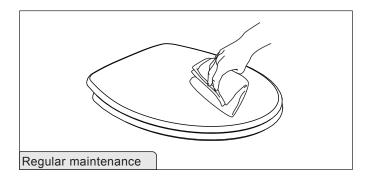

Clean the seat and hinge plates with a mild detergent then dry with a soft cloth.



- Don't clean the toilet seat with abrasive powder.
- Do not allow chemicals or cosmetics to come in contact with the seat.

